


**SINGLE DIRECTION VIBRATORY PLATE  
BP 12/50 A**

**PERFORMANCE DATA**

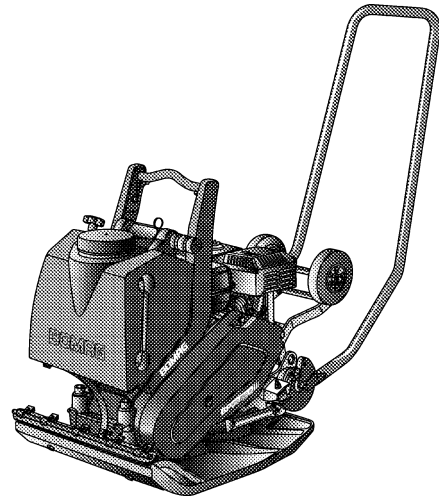


Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BP 12/50 A	5-10	11-15	

# Technical Data

## Shipping dimensions in m3

BP 12/50 A 0,195

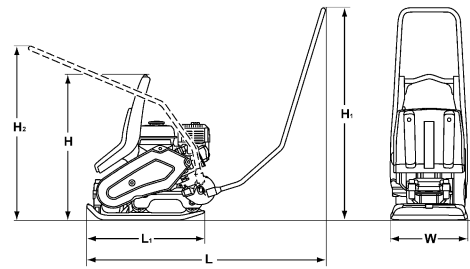

## Standard Equipment

- Highly wear resistant special base plate
- Sprinkler system
- Vibration insulated steering bow, foldable
- Detachable steering handle
- Automatic shutdown at low oil level
- Recoil starter
- Reinforced centrifugal clutch
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

## Optional Equipment

- Transport wheels (+5kg)
- Tool kit
- Special painting
- Service Kit
- Steering handle centre-position (H2=900mm)

## Dimensions in mm

	H	H1	H2	L	L1	W
BP 12/50 A	658	962	700	1084	545	500

## Technical Data

### Weights

Operating weight CECE .....	kg	75
Basic weight .....	kg	74

### Dimensions

Working width .....	mm	500
---------------------	----	-----

### Driving Characteristics

Working speed, max. ....	m/min	30
Max. gradeability (dep. on soil con.) .....	%	30

### Drive

Engine manufacturer .....	Honda	
Type .....	GX 120	
Emission stage .....	CARB Phase III	
Cooling .....	air	
Number of cylinders .....	1	
Performance SAE J 1349 .....	kW	2,6
Speed .....	min-1	3.600
Drive system .....	mech.	
Fuel .....	gasoline	
Fuel comsump. aver. during operation .....	l/h	0,9

### Exciter system

Frequency .....	Hz	100
Centrifugal force .....	kN	12
Amplitude .....	mm	1,02

### Capacities

Fuel .....	l	2,0
Water .....	l	13,5

Technical modifications reserved. Machines may be shown with options.



PRE 230 07 001

170215 Sa05

**BOMAG**  
 Hellerwald  
 D-56154 Boppard  
 P.O. Box 5162  
 Tel. (0)6742 - 1000  
 Fax (0)6742 - 3090

