

**REVERSIBLE VIBRATORY PLATES
BPR 40/60 D**

PERFORMANCE DATA




Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses			
	Rock fill	Gravel, sand	Mixed soil	Silt, clay
BPR 40/60 D	-	21-30	17-24	10-15

Technical Data

Shipping dimensions in m3

BPR 40/60 D 0,623

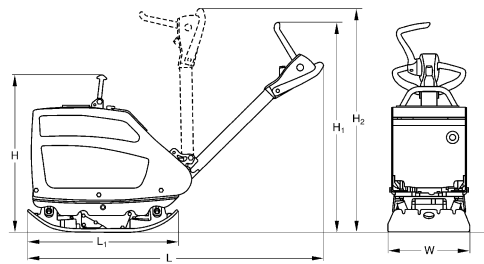

Standard Equipment

- Fully closed engine protection hood made of high-strength steel
- Single lever control
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear resistant base plate
- Fully protected V-belt
- Automatic decompression
- Recoil starter
- 3-2-1 Warranty
- Hour meter

Optional Equipment

- Transport wheels (+5 kg)
- Electric starter (+20 kg)
- Tool kit
- Special painting
- Plastic mat
- Service Kit

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 40/60 D	688	820	1220	1510	762	600

Technical Data

Weights

Operating weight CECE (W)	kg	260
Basic weight	kg	257

Dimensions

Basic working width	mm	600
Lowest passing height	mm	688
Min. height w. steering in top position	mm	820
Max. height w. steering in top position	mm	1.120

Driving Characteristics

Working speed, max.	m/min	27
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Hatz	
Type	1B20	
Emission stage	non EPA	
Cooling	air	
Number of cylinders	1	
Performance ISO 3046	kW	3,1
Speed	min-1	3.000
Drive system	mech.	
Fuel	diesel	
Fuel consump. aver. during operation	l/h	0,7

Exciter system

Frequency	Hz	80
Centrifugal force	kN	40
Amplitude	mm	1,40

Capacities

Fuel	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 692 93 001

200215 Sa

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

