


**TANDEM VIBRATORY ROLLERS
BW 154 AP-4, BW 154 AP-4I, BW 174 AP-4I**

PERFORMANCE DATA

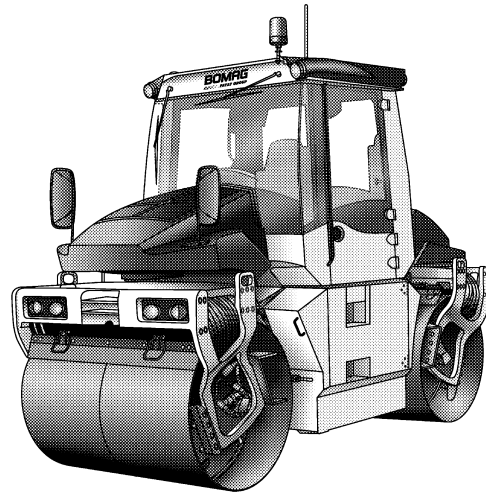

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-14 cm
BW 154 AP-4	30-60	60-130	80-160
BW 154 AP-4I	30-60	60-130	80-160
BW 174 AP-4I	50-110	90-180	140-210

Technical Data

Shipping dimensions in m3 with cabin


BW 154 AP-4	19,631
BW 154 AP-4I	19,631
BW 174 AP-4I	24,213

Standard Equipment

- ECOMODE
- Plastic water tank under the operator's platform
- Water-saving pressure sprinklers
- Individual vibration control
- 2 amplitudes / 2 frequencies
- Autom. vibration operation
- 4 spring-loaded hinged scrapers
- Indicator and hazard lights
- ROPS cabin with seat belts + heating
- 2 Outside mirrors
- Steering method/Operator's seat sliding / rotatable
- Steering with comfort control - 5 Steering modes
- Back-up alarm
- Emergency STOP
- Brake release device
- Split drums

Optional Equipment

- Edge cutter
- Rotary beacon
- Special paint
- Environmentally compliant hydraulic oil
- Tool kit
- Tachograph
- Precision spreader
- Air condition
- Radio/Radio preparation
- Lighting for drum edge
- Backup warning buzzer with broadband technology
- Additional outside mirrors
- Asphalt temperature display
- By-pass filter

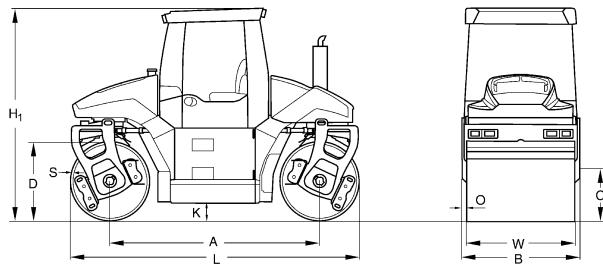

Dimensions in mm

	A	B	C	D	H1	K	L	O	S	W
BW 154 AP-4	2890	1665	735	1100	2955	240	3990	72	16	1500
BW 154 AP-4I	2890	1665	735	1100	2955	240	3990	72	16	1500
BW 174 AP-4I	3200	1826	660	1220	3000	288	4420	73	17	1680

Technical Data

	BOMAG	BOMAG	BOMAG
	BW 154 AP-4	BW 154 AP-4I	BW 174 AP-4I

Weights

Operating weight CECE w. ROPS-cabin	kg	7.100	7.100	9.200
Axle load, front / rear CECE	kg	3.550/3.550	3.550/3.550	4.700/4.500
Static linear load, front / rear CECE	kg/cm	23,7/23,7	23,7/23,7	28,0/26,8
Grossweight	kg	8.600	8.600	10.800

Dimensions

Track radius, inner	mm	2.950	2.950	2.946
---------------------	----	-------	-------	-------

Driving Characteristics

Speed (1)	km/h	0 - 10,0	0 - 10,0	0 - 10,5
-----------	------	----------	----------	----------

Drive

Engine manufacturer	Kubota	Kubota	Kubota	
Type	V 3307 DI-T	V3307 CR-T	V3800 CR-T	
Emission stage	3a/4i	3b/4	3b/4i	
Cooling	water	water	water	
Number of cylinders	4	4	4	
Fuel	diesel	diesel	diesel	
Performance ISO 14396	kW	55,4	55,4	74,0
Performance SAE J 1995	hp	74,2	74,2	99,2
Speed	min-1	2.200	2.400	2.600
Split drum		front + rear	front + rear	front + rear

Brakes

Service brake	hydrost.	hydrost.	hydrost.
Parking brake	mech.	mech.	mech.

Steering

Steering system	2-p. pivoted	2-p. pivoted	2-p. pivoted
Lateral displacement right/left	mm	1.130	1.350

Exciter system

Drive system	hydrost.	hydrost.	hydrost.	
Frequency	Hz	40/55	45/60	
Amplitude	mm	0,66/0,32	0,46/0,20	
Centrifugal force	kN	69/63	69/63	80/61

Sprinkler System

Type of sprinkling	pressure	pressure	pressure
--------------------	----------	----------	----------

Capacities

Fuel	l	155,0	155,0	180,0
Water	l	550,0	550,0	750,0

Technical modifications reserved. Machines may be shown with options.



PRE 870 34 001

170215 Sa09

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

